


Pribusin Inc.

Manufacturers of Process
Controls and Instrumentation

Model: ITC-24V/1A

24 VDC Terminal Power Supply

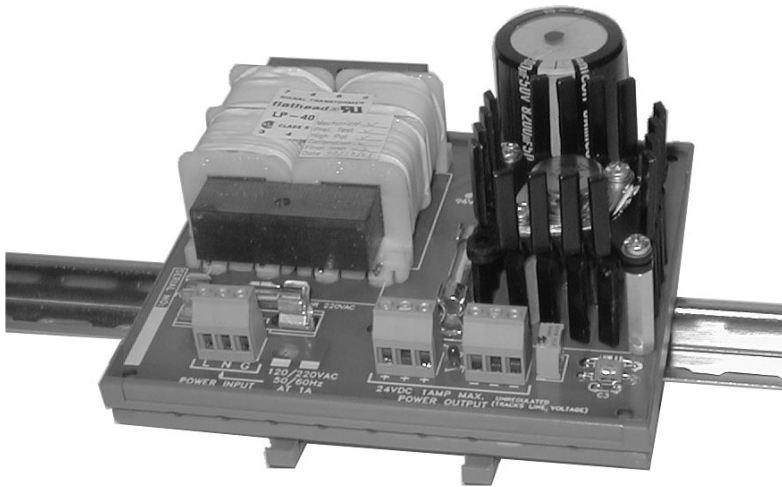

Standard features:

- High Power to Output Isolation (1500 VAC Test)
- Small Size - Fits on Terminal Block Rail
- 24 VDC Output @ 1A (Regulated)
- Power 117 VAC, 60 Hz
- Protected by Fast-acting Fuse
- CSA and NRTL Approved (Lr51078)

Function:

The ITC-24V/1A is an isolated 24 VDC Power Supply. It is ideal for supplying power to other DIN rail mount instruments such as the series ITC, TWI, TWN or any other 24 VDC powered instrument. Its small size and easy installation make it ideal for crowded control panels where an isolated power supply is required.


The built in fast-acting fuse protects the power supply from damage in case of a short circuit at the output.

Specifications:

- Isolation: 1500 VAC (Test)
- Power: 117 VAC, 60 Hz
- Fuse: Primary: MDL1 Secondary: AGC 1.5
- Output: 24 VDC, 1A max. (Regulated)
- Operating Temperature: -40 Deg. C. to + 50 Deg. C.

ITC-24V/1A

Dimensions & Connection:

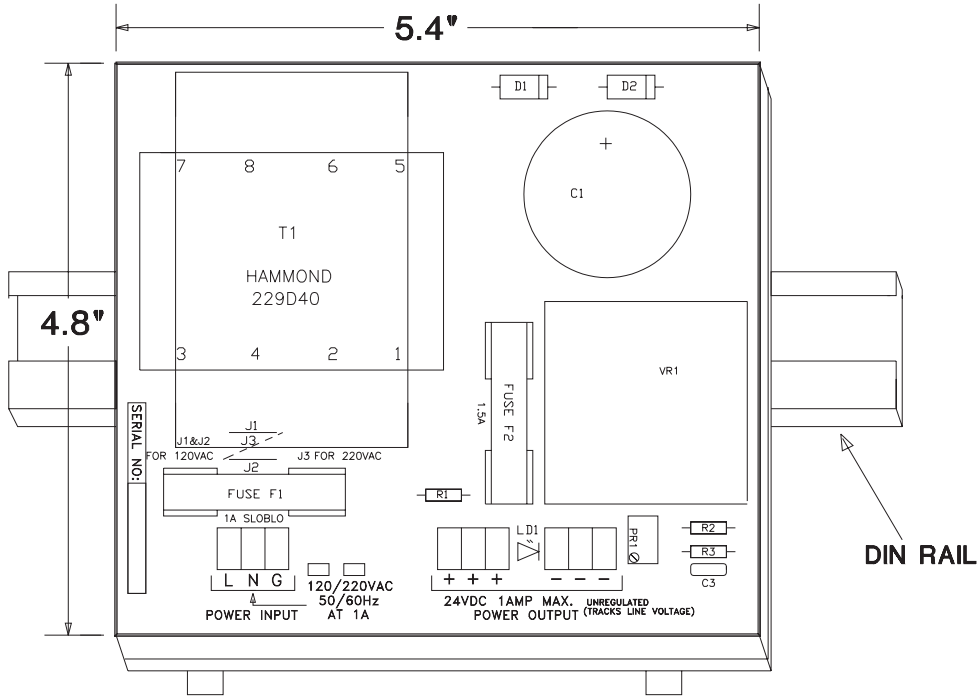

Manufactured By:

Pribusin Inc.

www.pribusin.com
info@pribusin.com

USA:

Pribusin Inc.
 4319 E. Apple Ave.
 Muskegon, MI 49442
 Ph: (231) 788-2900
 Fx: (231) 788-2929



CANADA:

Pribusin Inc.
 101 Freshway Dr. Unit 57
 Concord, Ontario, L4K 1R9
 Ph: (905) 660-5336
 Fx: (905) 660-4068